PureLine
30” Convection Oven

H 6880 BP

mieleusa.com

H 6880 BP
Features:

- M Touch controls are both easy to operate and navigate. An intuitive swipe of the screen will quickly lead you to your desired selection
- Self Clean Oven
- 19 Operating Modes including Moisture Plus (plumbed only) increases the humidity in the oven optimizing the cooking of a variety of foods
- MasterChef Plus — fully functional automatic programs to create 15 different types of bread at home
- MasterChef menu offers over 100 food types to cook to perfection
- Wireless Roast Probe for safe. easy handling and perfect roasting results
- Favorites — up to 20 recipes
- Sabbath Program
- CleanGlass Door
- TwinPower Fans provide optimum and even distribution of hot air
- Soft Open and Soft Close for easier handling
- The simple yet sleek Silhouette handle seems to float enhancing its modern design lines

Comfort Handle:
Optional with ContourLine

(DS 6708 Item #09828380)

ComfortSwivel Handle:
Standard with ContourLine
Optional for PureLine
(DS 6718 Item # 09828390)

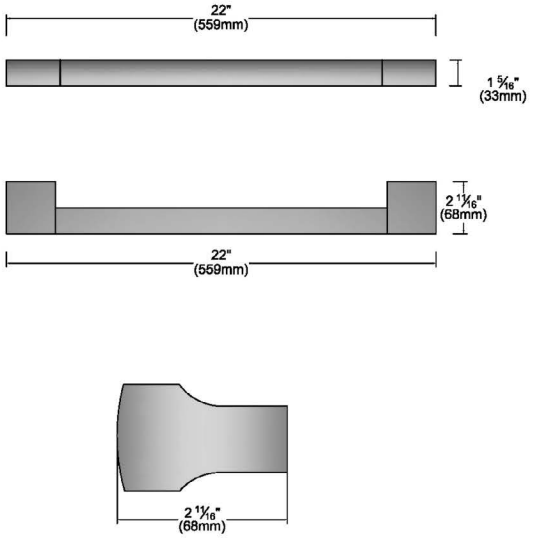

Silhouette Handle:
Standard with Pureline
Optional for Contourline
(DS 6808 Item # 09828400)

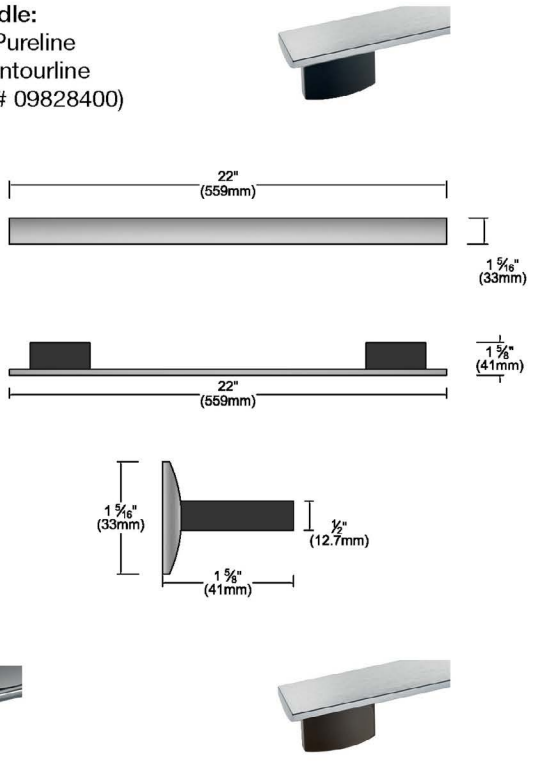

Silhouette Handle (Chrome):
Standard with BrilliantWhite
(DS 6808 Item # 09828410)

Silhouette Handle:
Standard with Truffle Brown
(DS 6808 Item # 09870690)

SPECIFICATIONS	
H 6880 BP — Item 22688053USA	
Overall Unit Width - Excluding Fascia Dimension	28 7/16” (722mm)
Overall Height - Excluding Fascia Dimension	27 3/4” (705mm)
Overall Unit Depth - Excluding Fascia Dimension	23 3/4” (603mm)
Oven Door Clearance	23” (584mm)
Overall Fascia Dimensions	29 13/16” (757mm) W x 28 5/8” (727mm) H x 7/8” (23mm) D
Built-In	
Minimum Cabinet Width	28 1/2” (724mm)
Minimum Cabinet Depth	24” (610mm)
Minimum Cabinet Opening Height	28 1/4” (718mm)
Minimum Base Support	193 lbs
Additional Cut-outs Required	Venting cut-out required at base of cabinet (4” x 28” / 100mm x 720mm) in the bottom of the cabinet for power cord and ventilation
Plumbing	
Plumbing Requirements	An Inline water filter, like activated carbon, is required to reduce mineral deposits. Do not connect to a Reverse Osmosis (RO) water system. Connect to a cold water supply only. Must be connected to a shut-off valve. The water shut-off valve must be accessible after installation.The water pressure must be between 14.5 and 145 psi (1 and 10 bars). If the pressure is higher, install a pressure-reducing valve. The supplied hose has a length of 4’ 11” (1.5 m). The hose must not be shortened.
Plumbed Hose Connection	Supplied hose: flexible braided 4’11” (1.5m) with 3/8” O.D. fitting for connection to a shut-off valve
Electrical	
Electrical Requirements	208/240V 30A 60Hz circuit
Power Cord	Yes - NEMA 14-30 plug
Electrical Rating	120/208V, 60Hz, 5000w / 120/240V, 60Hz, 6700w
Total Amps	240V / 28A / 208V / 24A
Shipping	
Shipping Weight	216 lbs
Shipping Dimensions	32 11/16” W x 35 1/16” H x 30 5/16” L
Support	
Call	800.843.7231
20/20	2020technologies.com

PRODUCT VIEWS

Isometric

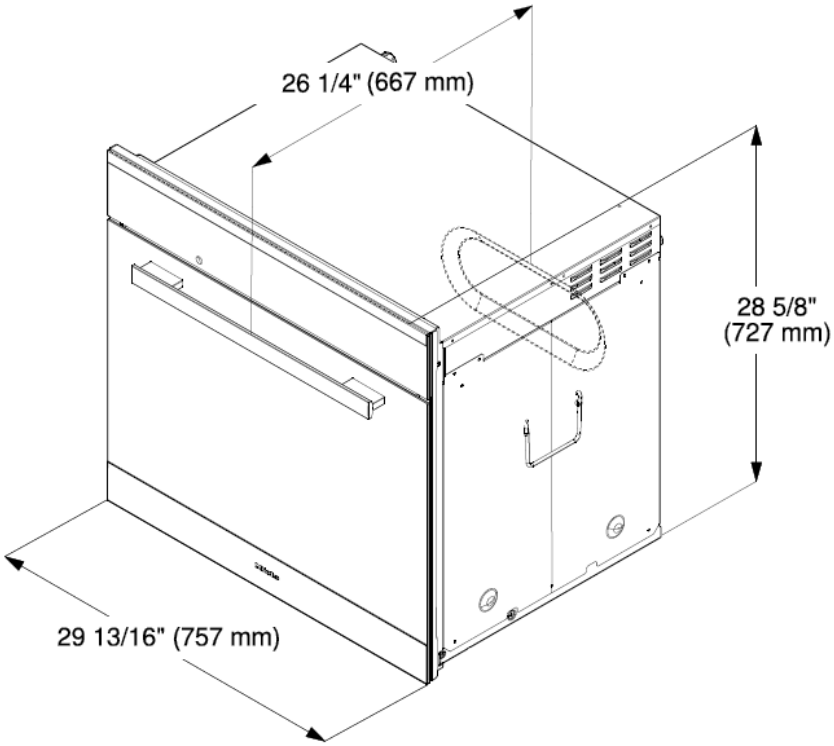

Front

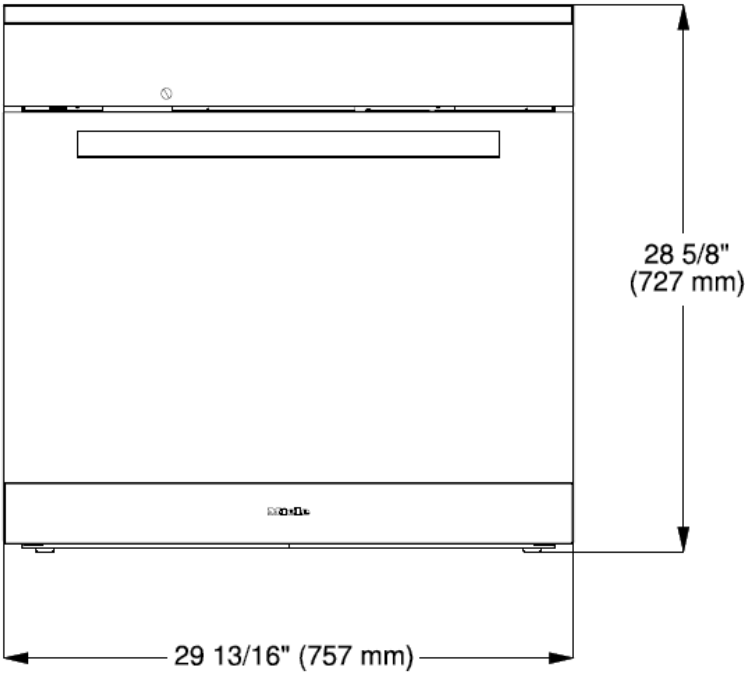

PRODUCT VIEWS

Top View

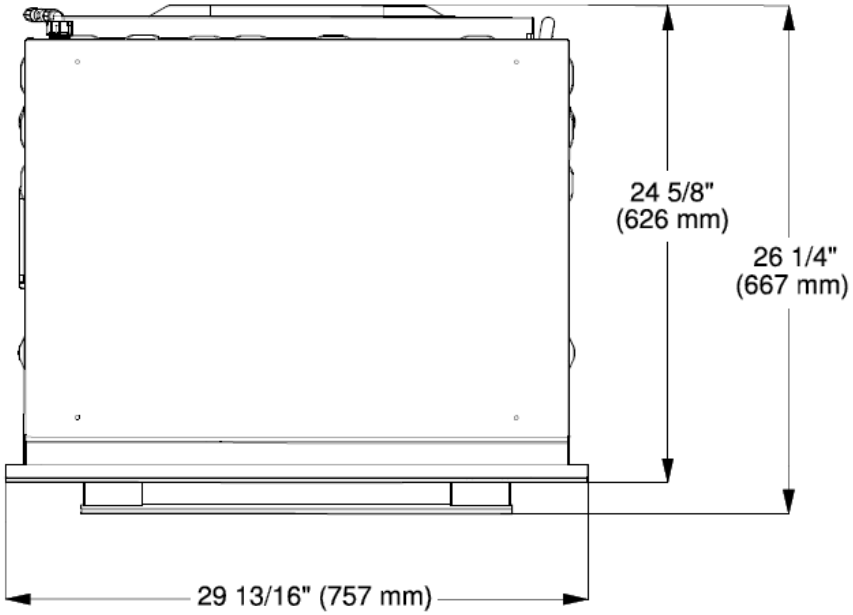

Rear View

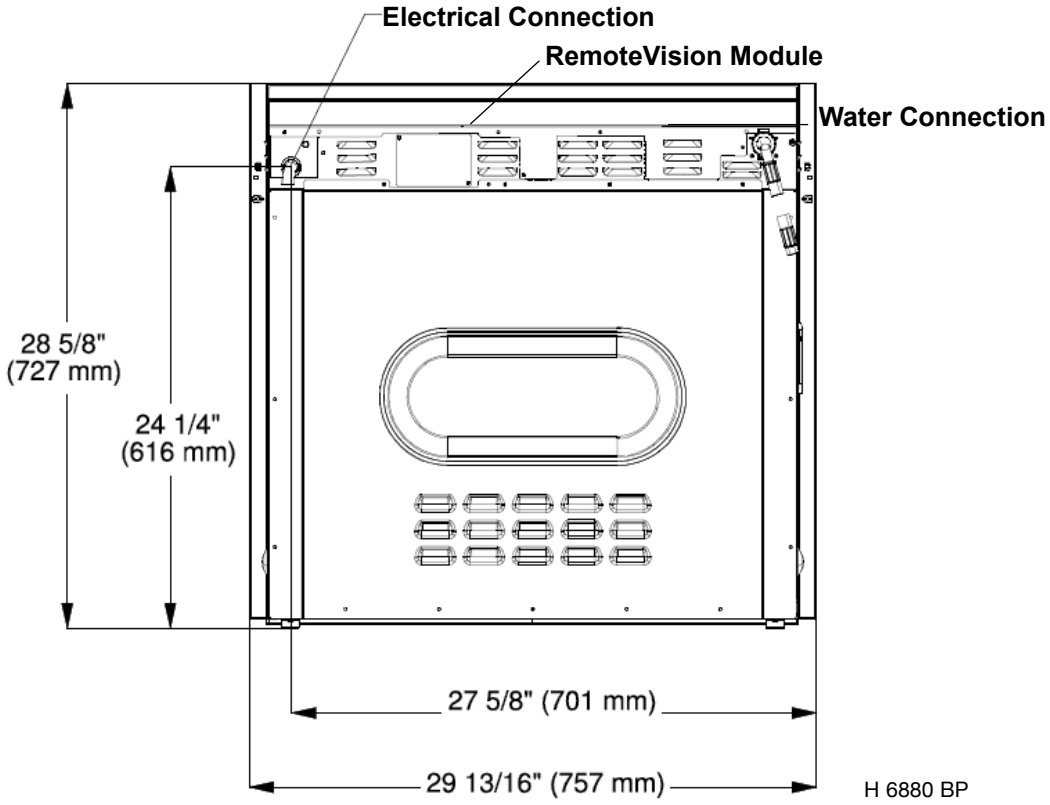

PRODUCT VIEWS

Side View

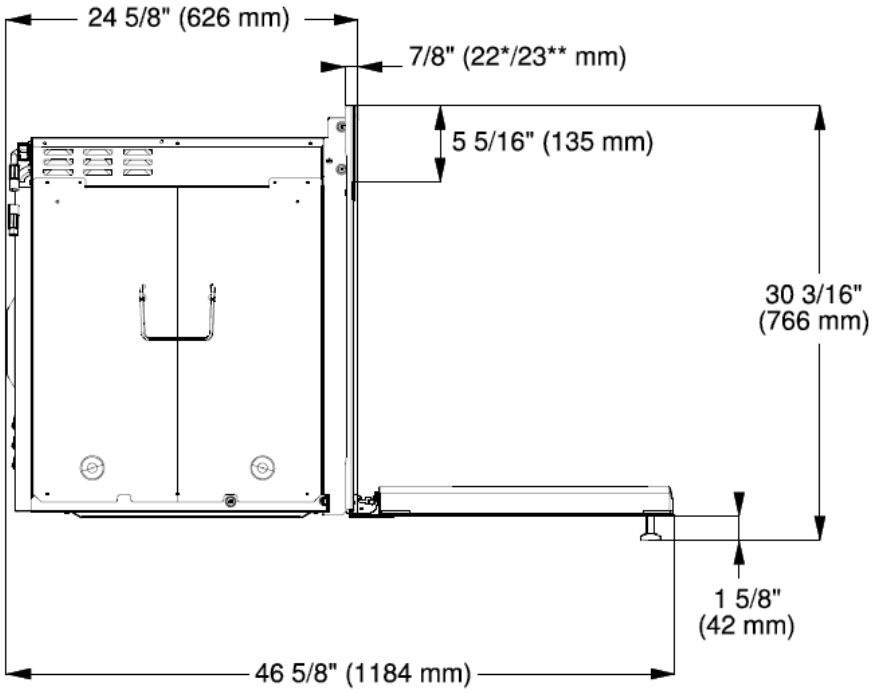

INSTALLATION SPECIFICATIONS

Install in Tall Cabinet

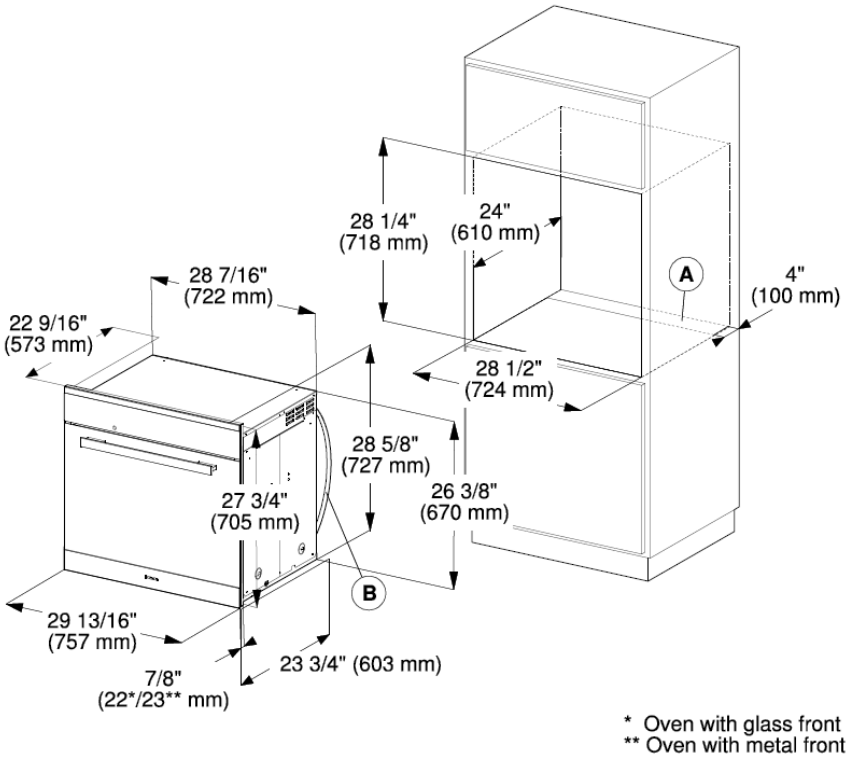

* Oven with glass front
** Oven with metal front

INSTALLATION SPECIFICATIONS

Undercounter Installation

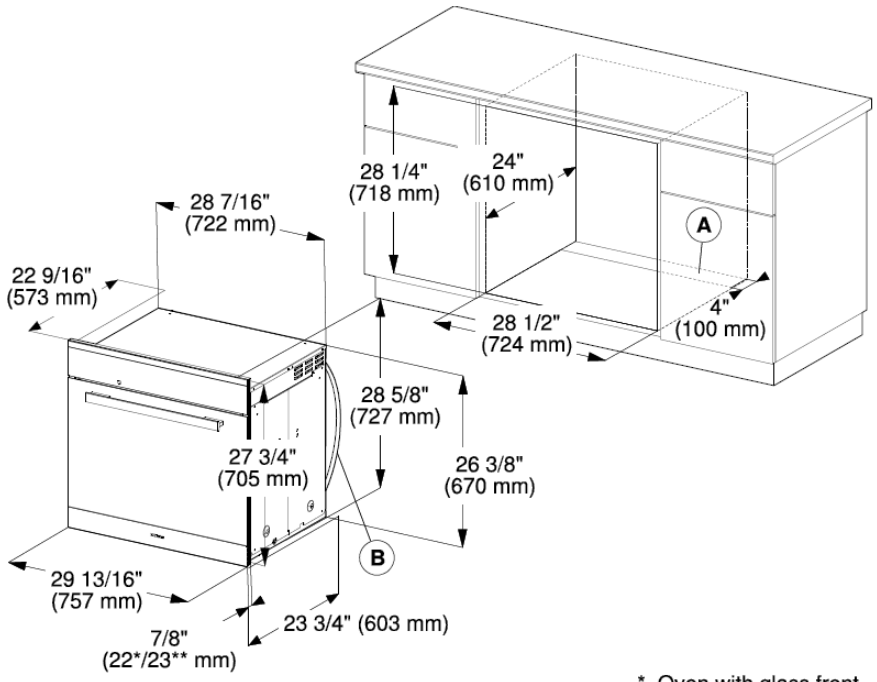

* Oven with glass front
** Oven with metal front